



VERSACORK®

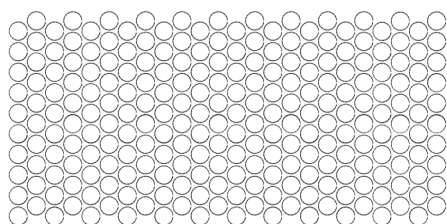

PREMIUM

Disc Size	1"
Tile Dimension	600*300mm (24 x 12")
Tile Depth	6mm (1/4")
Coverage per tile	1.83 sq.ft.
Weight per tile	0.5 lbs.

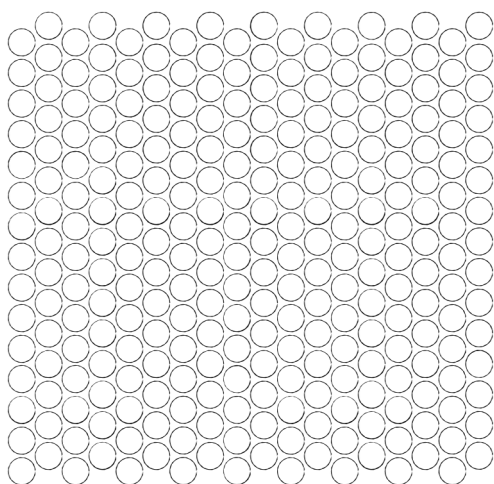

MEGA

Disc Size	1-3/8"
Tile Dimension	600*600mm (24 x 24")
Tile Depth	6mm (1/4")
Coverage per tile	3.86 sq.ft.
Weight per tile	1 lbs.

Product Overview

Veracork® is a cork mosaic made from 'post-industrial' recycled cork discs from the wine bottling industry. Suitable for flooring and wall installations, Versacork provides unmatched design versatility with technical benefits no other tile can offer. The **PREMIUM** uses standard 1" wine cork discs found used in 'traditional' wine bottles. The **MEGA** uses larger, 1-3/8" discs, used primarily in the larger sized, high-volume bottles.

Specifications

Description: Tile mosaic made from post-industrial recycled wine cork stoppers.

Version (select one): Premium, Mega

Finish (select one): Prefinished, Unfinished

Grout Color: (select one from recommended Bostik TruColor Rapidcure selection: inquire for list)


Composition: 100% post-industrial recycled cork

Fire-rating: Class "B" (Note: in 'sprinkled' assemblies, per NFPA 2015, these equate to a Class "A").

NRC: 0.10

Installation: Glue (Wakol Loba MS262) or apply with thin set mortar, and then grout

NOTE: Versacork comes either in Prefinished (with a commercial-grade wear-based urethane), or Unfinished (so it can be stained/painted any color).

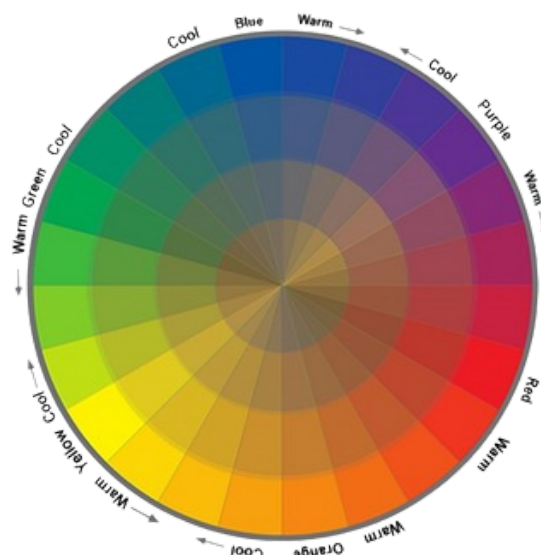

Sustainable Attributes

- Made from rapidly renewable cork (harvested without harm to tree on 9-year cycle)
- Recycled content:
 - made from 100% industrial by-product cork
- Carbon neutral product
- Zero-carbon manufacturing
- Low-VOC and CDPH compliant
- High-touch handmade product
- Sustainable supply chain and anti-modern slavery

Environmental Certification

Versacork is sourced from sustainably harvested 'by-product' material that is both rapidly renewable and strictly controlled and therefore can be considered 'sustainable' and carbon neutral.

The Versacork mosaic discs are made of un-altered natural cork (no adhesives or additives and therefore can be considered both low-VOC and Formaldehyde-free).

Installation adhesive certifications (with recommended: Bostik TruColor Rapidcure)

- HPD (Health Product Declaration)
- FloorScore certification
- South Coast Air Quality Management District compliance (SCAQMD- Rule 1168)

Green Building Certification

Sustainable Materials products meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project. For support and guidance on available rating system points please visit www.SustainableMaterials.com, or speak with your Sustainable Materials account manager.

Product Testing Specifications

Fire Behavior: Classification CSTB = M3

Smoke Density: Flaming: 148, Non-flaming: 272 (per ASTM E 662 and NFPA 258)

Formaldehyde: Class E0 Phenol

Compression Recovery: Initial: 10%; Residual (after 1.5 hours): 1.5% (per ISO 9727)

Density: $\geq 500\text{kg/m}^3$

Coefficient of Friction: Premium - Wet .879 / Dry 1.1; Mega Wet - .89 / Dry 1.15

Thermal Insulation: 0.0958 Kcal/m³hoC

Thermal Conductivity: 0.3490 W/mC

Thermal Resistance: 0.49 m²C/W

Water Vapor Transmission: 0.128 grains/h ft²

Permeance: 0.183 perms (per ASTM E 96)

GET IN TOUCH

+1 720.449.3063

info@sustainablematerials.com

